



MAVERICK®

COMMERCIAL CARPET & TILES

CARPET TILES



MAVERICK®
COMMERCIAL CARPET & TILES

CARPET TILES



Hospitality



Office



Retail



Care

6 products - a complete commercial carpet tiles portfolio

MAXIMA MEDUSA MATRIX MARVEL MAMBO MANTRA



MAVERICK®
COMMERCIAL CARPET & TILES

CARPET TILES

- iMax Solution Dyed Nylon
 - 1/10 gauge – dense construction
 - Flammability: Bfl-s1
 - Use class 33 – Heavy commercial use
- **Wear resistant and easy to maintain**




iMax® is a unique SDN, **solution dyed nylon**, that combines the superb resilience of a high-quality polyamide with the benefits of a solution dyed yarn.
Colourfast, carefree & wear-resistant: **iMax**® stands for guaranteed longevity, which also makes it the ideal yarn for **contract carpet**.

MAXIMA TILE

Type of manufacture (carpet tile)	ISO 2424		1/10 Loop Pile (tufted)
Dimensions	EN ISO 24342	cm	50cm x 50cm (20 tiles/box)
Primary backing	ISO 2424		Polyester non-woven
Secondary backing	ISO 2424		Bitumen
Pile fibre composition	ISO 2424		iMax® 100% Solution Dyed Nylon (SDN)
Total thickness	ISO 1765	mm	5,6
Effective pile thickness	ISO 1766	mm	2,6
Total mass	ISO 8543	g/m²	4.015
Total pile mass	ISO 2424	g/m²	520
Effective pile mass	ISO 8543	g/m²	340
Pile density	ISO 8543	g/cm³	0,131
Number of tufts	ISO 1763	/dm²	1.810
Static electrical propensity	ISO 6356	kV	≤ 2
Use classification	EN 1307		33 Contract use - Heavy
Luxury rating	EN 1307		LC1
Thermal resistance	ISO 8302	m².K/W	0,09
Dimensional stability	EN 986	%	≤ 0,20
Flammability	EN 13501-1		Bfl - s1 Loose laid (2020/211-1)
Prodis - GUT	www.pro-dis.info		127826
DOP			1008#IL0011
Laying direction			



85 - 90

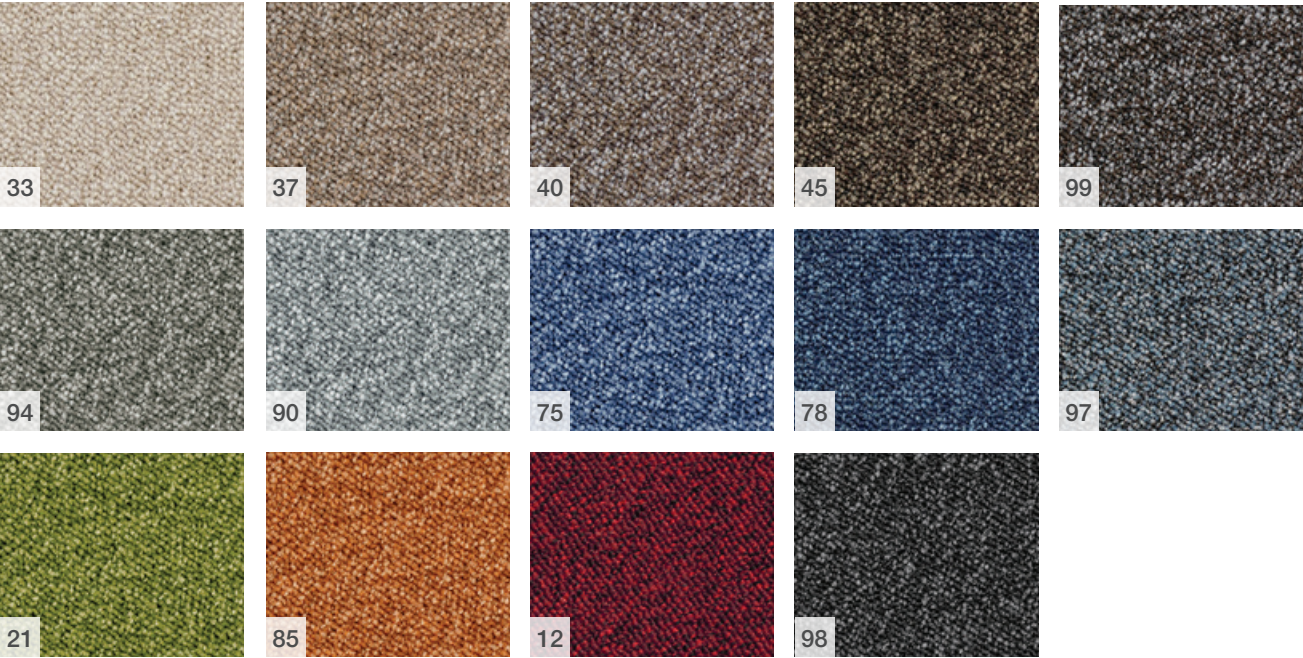

77E5E731



www.gut-prodis.eu

EN 14041



20

NB: 2401



FOR USE AS FLOOR COVERING IN BUILDINGS.

DOP: 1008#IL0011

Associated Weavers Europe NV
Weverijstraat 1
B - 9600 Ronse




iMax®
SDN YARN

MEDUSA TILE

Type of manufacture (carpet tile)	ISO 2424		1/10 Loop Pile (tufted)
Dimensions	EN ISO 24342	cm	50cm x 50cm (20 tiles/box)
Primary backing	ISO 2424		Polyester non-woven
Secondary backing	ISO 2424		Bitumen
Pile fibre composition	ISO 2424		iMax® 100% Solution Dyed Nylon (SDN)
Total thickness	ISO 1765	mm	5,4
Effective pile thickness	ISO 1766	mm	2,4
Total mass	ISO 8543	g/m²	4.000
Total pile mass	ISO 2424	g/m²	505
Effective pile mass	ISO 8543	g/m²	280
Pile density	ISO 8543	g/cm³	0,117
Number of tufts	ISO 1763	/dm²	1.970
Static electrical propensity	ISO 6356	kV	≤2
Use classification	EN 1307		33 Contract use - Heavy
Luxury rating	EN 1307		LC1
Thermal resistance	ISO 8302	m².K/W	0,09
Dimensional stability	EN 986	%	≤ 0,20
Flammability	EN 13501-1		Bfl - s1 Loose laid (2020/210-1)
Prodis - GUT	www.pro-dis.info		127825
DOP			1008#IL0011
Laying direction			



77 - 11

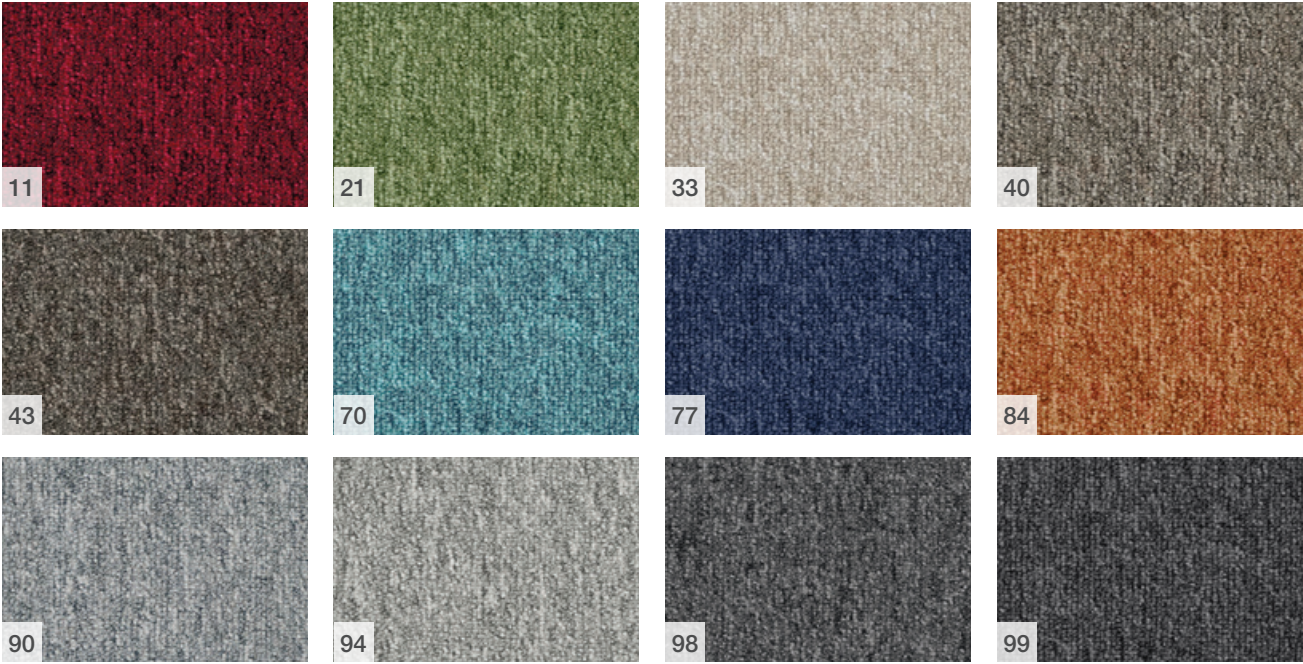

5CEE6DE

www.gut-prodis.eu

EN 14041

20

NB: 2401

FOR USE AS FLOOR COVERING IN BUILDINGS.

DOP: 1008#IL0011

Associated Weavers Europe NV

Wevenijstraat 1

B - 9600 Ronse


SDN YARN

MANTRA TILE


Type of manufacture (carpet tile)	ISO 2424		1/10 Loop Pile (tufted)
Dimensions	EN ISO 24342	cm	50cm x 50cm (24 tiles/box)
Primary backing	ISO 2424		Polyester non-woven
Secondary backing	ISO 2424		Bitumen
Pile fibre composition	ISO 2424		100% Solution Dyed Nylon (SDN)
Total thickness	ISO 1765	mm	5,2
Effective pile thickness	ISO 1766	mm	2,2
Total mass	ISO 8543	g/m²	3.606
Total pile mass	ISO 2424	g/m²	350
Effective pile mass	ISO 8543	g/m²	253
Pile density	ISO 8543	g/cm³	0,114
Number of tufts	ISO 1763	/dm²	2.301
Static electrical propensity	ISO 6356	kV	≤2
Use classification	EN 1307		33 Contract use - Heavy
Luxury rating	EN 1307		LC1
Thermal resistance	ISO 8302	m².K/W	0,09
Dimensional stability	EN 986	%	≤ 0,20
Flammability	EN 13501-1		Bfl - s1 Loose laid (2021/117-1)
Prodis - GUT	www.pro-dis.info		B9DEFB5F
DOP			1008#IL0011
Laying direction			



97

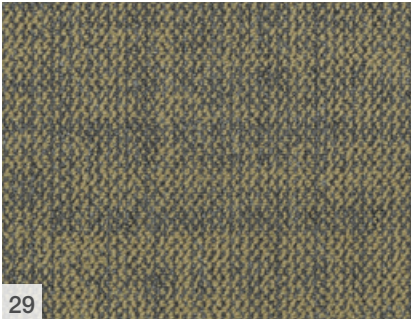


29

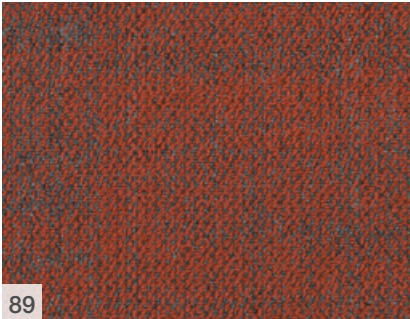


89




94

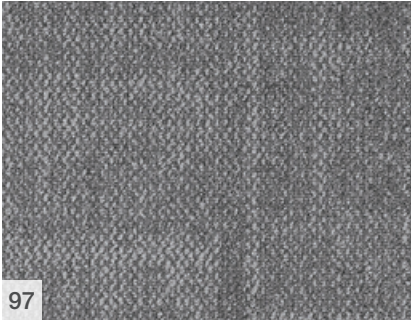

97

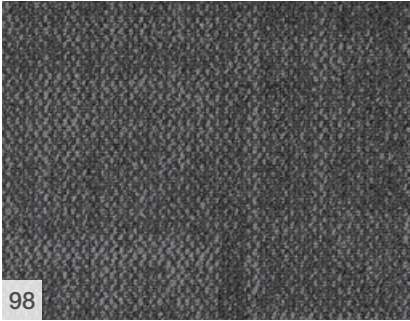

98

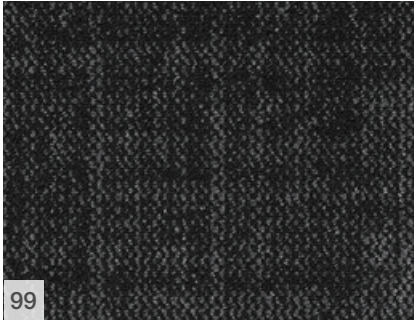

99

B9DEFB5F



www.gut-prodis.eu

EN 14041



21

NB: 2401



FOR USE AS FLOOR COVERING IN BUILDINGS.

DOP: 1008#IL0011

Associated Weavers Europe NV
Weverijstraat 1
B - 9600 Ronse




iMax
SDN YARN

MARVEL TILE


Type of manufacture (carpet tile)	ISO 2424		1/10 Loop Pile (tufted)
Dimensions	EN ISO 24342	cm	50cm x 50cm (24 tiles/box)
Primary backing	ISO 2424		Polyester non-woven
Secondary backing	ISO 2424		Bitumen
Pile fibre composition	ISO 2424		100% Solution Dyed Nylon (SDN)
Total thickness	ISO 1765	mm	5,2
Effective pile thickness	ISO 1766	mm	2,2
Total mass	ISO 8543	g/m²	3.606
Total pile mass	ISO 2424	g/m²	350
Effective pile mass	ISO 8543	g/m²	253
Pile density	ISO 8543	g/cm³	0,114
Number of tufts	ISO 1763	/dm²	2.301
Static electrical propensity	ISO 6356	kV	≤2
Use classification	EN 1307		33 Contract use - Heavy
Luxury rating	EN 1307		LC1
Thermal resistance	ISO 8302	m².K/W	0,09
Dimensional stability	EN 986	%	≤ 0,20
Flammability	EN 13501-1		Bfl - s1 Loose laid (2021/117-1)
Prodis - GUT	www.pro-dis.info		1FED880D
DOP			1008#IL0011
Laying direction			



99

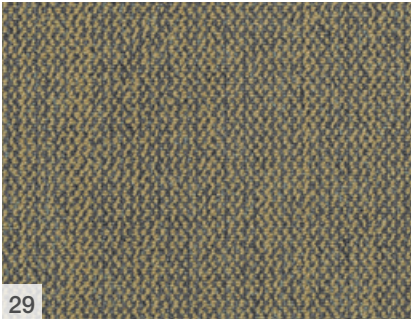


29

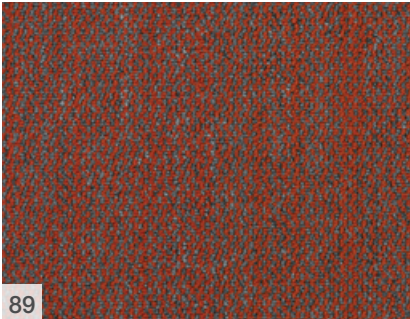


89




94

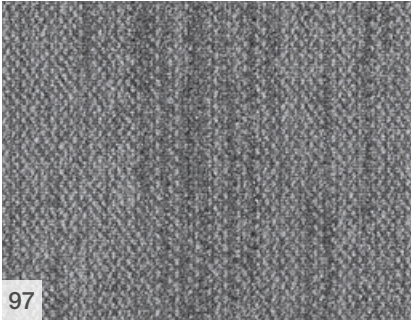

97

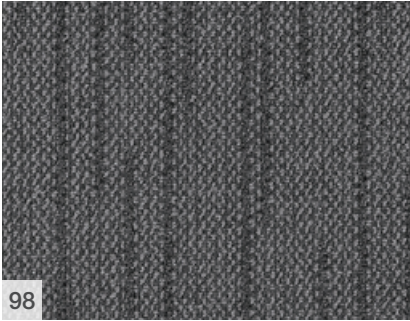

98

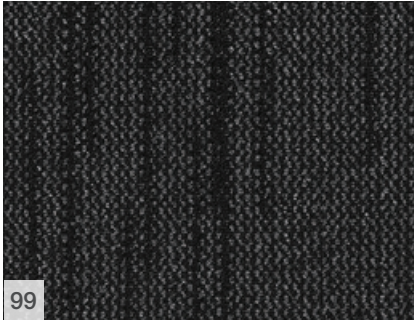

99

1FED880D



www.gut-prodis.eu

EN 14041



21

NB: 2401



FOR USE AS FLOOR COVERING IN BUILDINGS.

DOP: 1008#IL0011


Associated Weavers Europe NV
Weverijstraat 1
B - 9600 Ronse



SDN YARN

MAMBO TILE

Type of manufacture (carpet tile)	ISO 2424		1/10 Loop Pile (tufted)
Dimensions	EN ISO 24342	cm	50cm x 50cm (24 tiles/box)
Primary backing	ISO 2424		Polyester non-woven
Secondary backing	ISO 2424		Bitumen
Pile fibre composition	ISO 2424		100% Solution Dyed Nylon (SDN)
Total thickness	ISO 1765	mm	5,9
Effective pile thickness	ISO 1766	mm	2,6
Total mass	ISO 8543	g/m²	4.060
Total pile mass	ISO 2424	g/m²	500
Effective pile mass	ISO 8543	g/m²	323
Pile density	ISO 8543	g/cm³	0,124
Number of tufts	ISO 1763	/dm²	1.950
Static electrical propensity	ISO 6356	kV	≤2
Use classification	EN 1307		33 Contract use - Heavy
Luxury rating	EN 1307		LC1
Thermal resistance	ISO 8302	m².K/W	0,10
Dimensional stability	EN 986	%	≤ 0,20
Flammability	EN 13501-1		Bfl - s1 Loose laid (2021/106-1)
Prodis - GUT	www.pro-dis.info		782D6F6B
DOP			1008#IL0011
Laying direction			

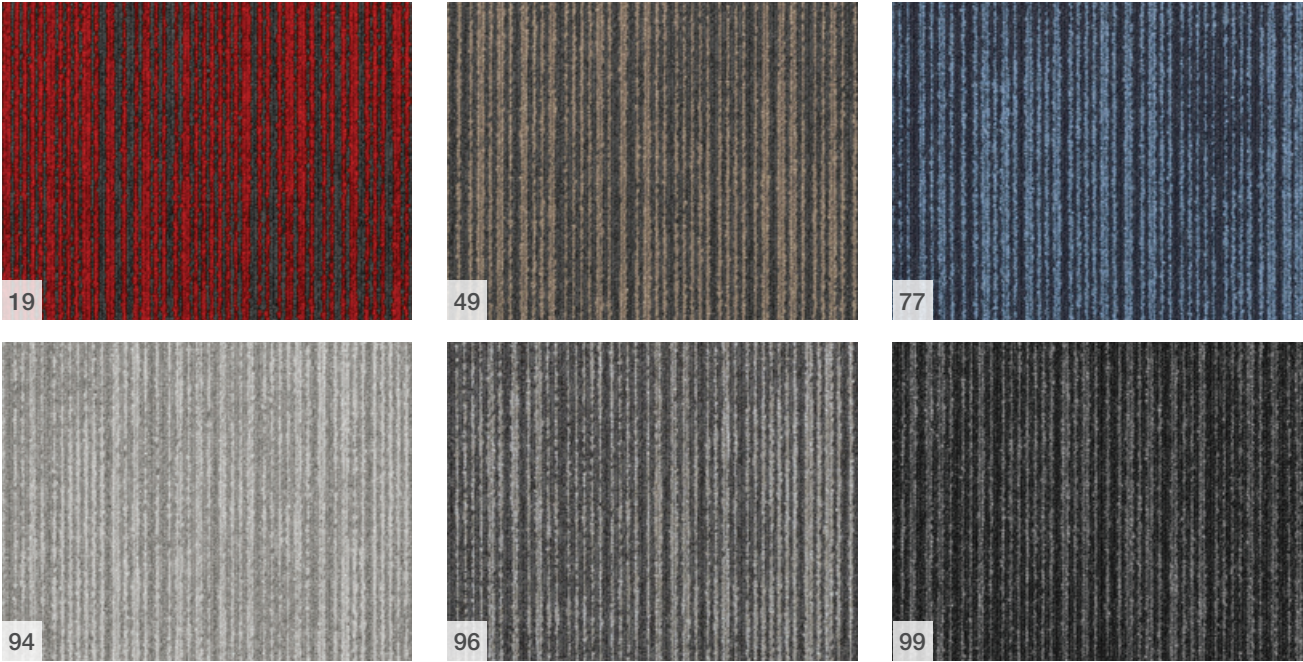

782D6F6B



www.gut-prodis.eu

EN 14041



NB: 2401

FOR USE AS FLOOR COVERING IN BUILDINGS.

DOP: 1008#IL0011

Associated Weavers Europe NV

Weverijstraat 1

B - 9600 Ronse




iMax
SDN YARN

MATRIX TILE

Type of manufacture (carpet tile)	ISO 2424		1/10 Loop Pile (tufted)
Dimensions	EN ISO 24342	cm	50cm x 50cm (20 tiles/box)
Primary backing	ISO 2424		Polyester non-woven
Secondary backing	ISO 2424		Bitumen
Pile fibre composition	ISO 2424		100% Solution Dyed Nylon (SDN)
Total thickness	ISO 1765	mm	6,7
Effective pile thickness	ISO 1766	mm	3,2
Total mass	ISO 8543	g/m²	4.240
Total pile mass	ISO 2424	g/m²	650
Effective pile mass	ISO 8543	g/m²	426
Pile density	ISO 8543	g/cm³	0,135
Number of tufts	ISO 1763	/dm²	2.016
Static electrical propensity	ISO 6356	kV	≤2
Use classification	EN 1307		33 Contract use - Heavy
Luxury rating	EN 1307		LC2
Thermal resistance	ISO 8302	m².K/W	0,11
Dimensional stability	EN 986	%	≤ 0,20
Flammability	EN 13501-1		Bfl - s1 Loose laid (2021/107-1)
Prodis - GUT	www.pro-dis.info		4D1DDABC
DOP			1008#IL0011
Laying direction			



96 - 99

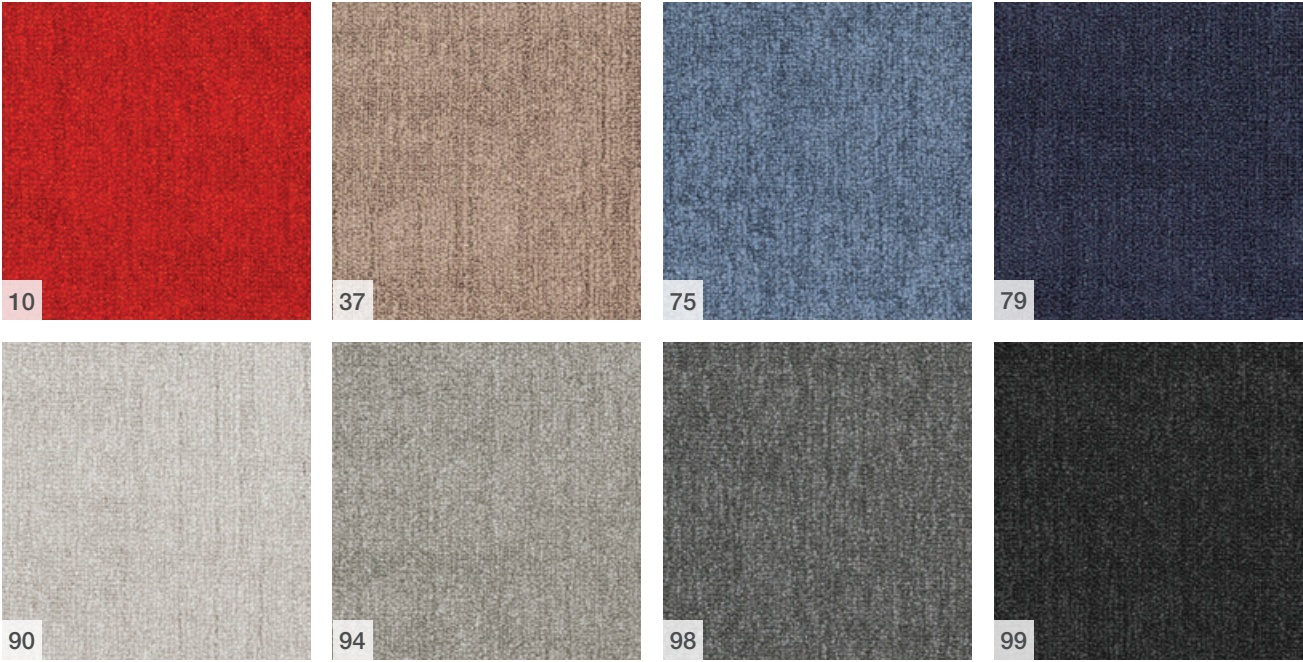

4D1DDABC



www.gut-prodis.eu

EN 14041



21



B_{1-s1}



NCS



DL



PCP



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...



...

NB: 2401

FOR USE AS FLOOR COVERING IN BUILDINGS.

DOP: 1008#IL0011

Associated Weavers Europe NV

Weverijstraat 1

B - 9600 Ronse

iMax

SDN YARN

